# C21572


## **Features:**


- Low Consumption 1.6 gpf (6.0 Lpf)
- Elongated Bowl
- Anti-Siphon Ball Cock Fill Valve
- Tamper-Resistant Volume Rated Flapper
- Reverse Trap
- Front Jet Flushing Action
- · Front Tank Lever
- All Standard Colors
- 2 Bolt Caps

## **Toilet Dimensions:**

Height	29 <sup>1</sup> /2"
Width	
Depth	29 <sup>5</sup> /6"
Rough-in	
Water Surface from Rim	5 <sup>7</sup> /8"
Trapway (min)	1 <sup>6</sup> /8"
Water Surface	10 <sup>5</sup> /8"*8 <sup>5</sup> /8'
Water Seal	2 <sup>1</sup> / <sub>4</sub> "
Shipping Weight	83.881bs








THIS FIXTURE QUALIFIES ACCORD-ING TO ASME TEST PROCEDURES AS A LOW CONSUMPTION WATER CLOSET WITH AN AVERAGE CON-SUMPTION OF 1.6 gpf (6 Lpf) OR LESS.



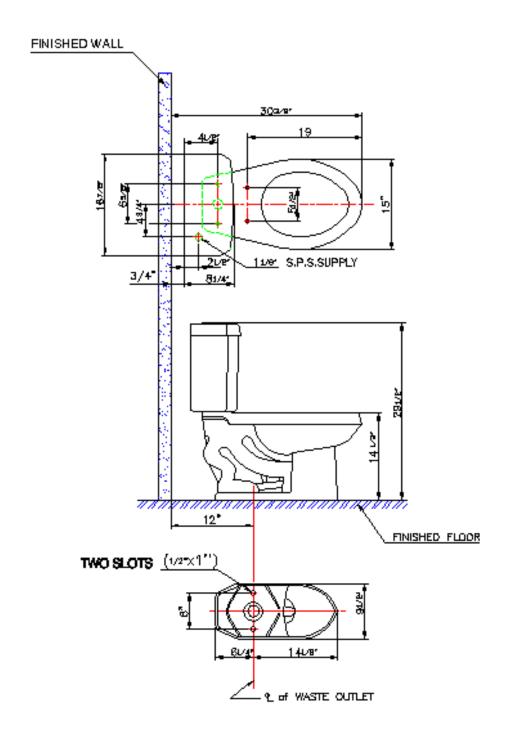

#### NOTES:

All dimensions are in inches.

Illustrations may not be drawn to scale.

#### IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A LOW CONSUMPTION WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.6 gpf (6 Lpf) OR LESS.